




**EASY LINE  
GRAPE PROCESSING**



# CRUSHER MICROENO, MINIENO, ENO 1 e ENO 2



ENO 1, ENO 2 - Stainless steel hopper, with engine

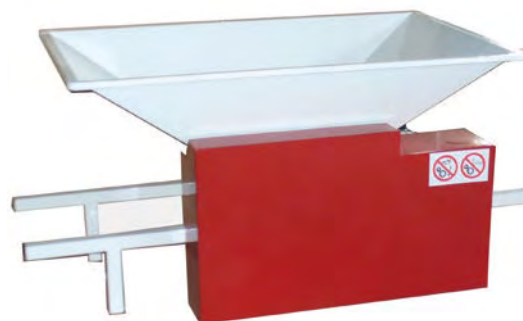

ENO 1, ENO 2 - smalted with engine



MICROENO, MINIENO, ENO 1, ENO 2 - inox hopper with flywheel



Safety protection

MODEL		
Cod.	Description	€
494	MICROENO - smalted hopper	125
491	MINIENO - smalted hopper and agitator	145
492	MINIENO - hopper and agitator Inox	205
501	ENO 1 - smalted hopper and agitator	160
502	ENO 1 - hopper and agitator Inox	235
503	ENO 1 - with ENGINE, smalted hopper and agitator	338
504	ENO 1 - with ENGINE, hopper and agitator Inox	420
511	ENO 2 - smalted hopper and agitator	180
512	ENO 2 - hopper and agitator Inox	270
513	ENO 2 - with ENGINE, smalted hopper and agitator	360
514	ENO 2 - with ENGINE, hopper and agitator Inox	415

STANDARD FEATURES
<ul style="list-style-type: none"> <li>• Autoadjustable food aluminium rollers</li> <li>• CE motor with emergency stop</li> <li>• Cartoon box packaging</li> <li>• Steel protective casing</li> </ul>

OPTIONAL		
Cod.	Description	€
006	Safety protection (required to issue a conformity declaration)	80

MODEL	ENGINE HP (Kw) MF-TF	HOURLY PRODUCTION	HOPPER	DIMENSION mm		WEIGHT		ROLLER LENGHT
				with flywheel	with engine	with flywheel	with engine	
MICROENO	---	200 - 450 Kg/h	555x455 mm	860x365x470	---	14 Kg	---	150 mm
MINIENO	---	300 - 500 Kg/h	650x470 mm	1000x390x490	---	18 Kg	---	220 mm
ENO 1	1 (0,75)	500 - 700 Kg/h	850x560 mm	1210x580x350	1210x500x570	22 Kg	33 Kg	220 mm
ENO 2	1 (0,75)	600 - 800 Kg/h	1000x630 mm	1210x620x400	1210x550x620	29 Kg	40 Kg	280 mm




# CRUSHER DESTEMMER ENO 3

ENO 3 INOX - with ENGINE, hopper and agitator Inox



ENO 3 - with flywheel smalted hopper and agitator

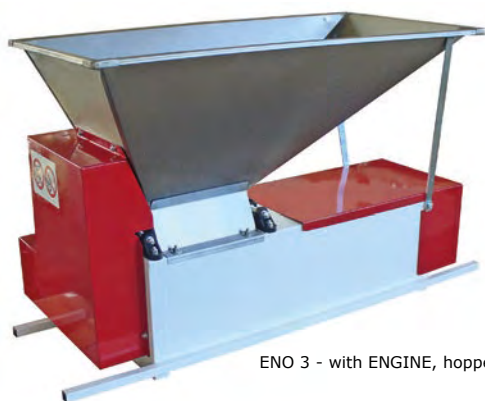


ENO 3 - with ENGINE, hopper Inox



Safety protection

### STANDARD FEATURES

- Autoadjustable food aluminium rollers
- CE motor with emergency stop
- Stainless steel basket
- Cartoon box packaging
- Steel protective casing

MODEL		
Cod.	Description	€
521	ENO 3 - smalted hopper and agitator	298
522	ENO 3 - hopper and agitator Inox	425
525	ENO 3 INOX - hopper and agitator Inox	630
523	ENO 3 - with ENGINE, smalted hopper and agitator	490
524	ENO 3 - with ENGINE, hopper and agitator Inox	595
526	ENO 3 INOX - with ENGINE, hopper and agitator Inox	848
OPTIONAL		
Cod.	Description	€
009	Inox stand with slide	180
530	Kit for transforming a flywheel into an engine.	265
006	Safety protection (required to issue a conformity declaration) 	95


MODEL	ENGINE HP (Kw) MF-TF	HOURLY PRODUCTION	HOPPER	DIMENSION mm		WEIGHT		ROLLER LENGHT
				with flywheel	with engine	with flywheel	with engine	
ENO 3	1 (0,75)	1000 - 1200 Kg/h	850x500 mm	1210x550x690	1210x600x690	40 Kg	51 Kg	220 mm
STAND	---	---	---	1100x500x250	1210x500x620	8 Kg	---	---



# DESTEMMER ENO 10



ENO 10 - with engine, inox

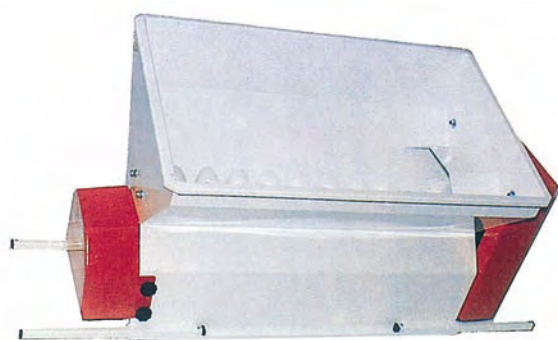

ENO 10 - with engine, smalted



Inox stand with slide




Safety protection

## STANDARD FEATURES

- CE motor with emergency stop
- Carton box packaging
- Steel safety protection
- steel protective casing

MODEL		
Cod.	Description	€
012	ENO 10 - with ENGINE, smalted	440
212	ENO 10 INOX - with ENGINE, Inox	740

OPTIONAL		
Cod.	Description	€
009	Inox stand with slide	180
006	Safety protection (required to issue a conformity declaration) 	95

MODEL	ENGINE HP (Kw) MF-TF	HOURLY PRODUCTION	SPEED	DIMENSION	WEIGHT
ENO 10	1 (0,75)	1000 - 1200 Kg/h	500 RPM	1210x600x690 mm	50 Kg
STAND	---	---	---	1100x550x620 mm	8 Kg



# CRUSHER DESTEMMER ENO 15




Video

Cod. 027 - 028

ENO 15 INOX - With engine




Safety protection

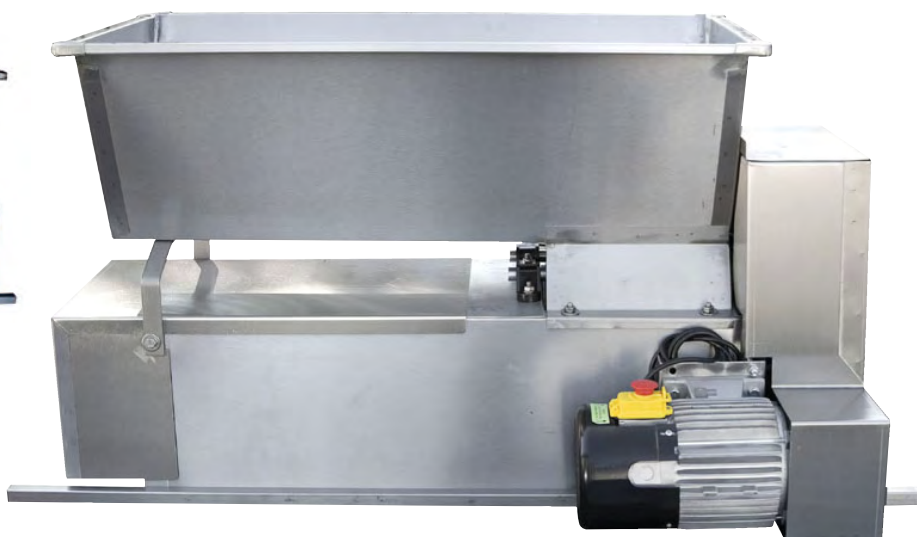

ENO 15 - with engine, smalted

MODEL		
Cod.	Description	€
025	ENO 15 - Aluminium roller, smalted hopper	515
024	ENO 15 - Rubber roller, smalted hopper	635
027	ENO 15 - Aluminium roller, Inox hopper	705
028	ENO 15 - Rubber roller, Inox hopper	820
225	ENO 15 INOX - Aluminium roller	930
224	ENO 15 INOX - Rubber roller	1.060

OPTIONAL		
Cod.	Description	€
009	Inox stand with slide	180
006	Safety protection (required to issue a conformity declaration) 	95

STANDARD FEATURES
<ul style="list-style-type: none"> <li>Adjustable aluminium roller for alimentary use</li> <li>HP 1 engine with CE emergency stop</li> <li>Stainless steel basket</li> <li>Cartoon box packing</li> <li>Steel protective casing</li> </ul>

MODEL	ENGINE HP (Kw) MF-TF	HOURLY PRODUCTION	SPEED	DIMENSION HOPPER	DIMENSION	WEIGHT
ENO 15	1 (0,75)	1600 - 1800 Kg/h	500 RPM	850x480	1210x600x630 mm	54 Kg
STAND	---	---	---	---	1100x550x620 mm	8 Kg



# CRUSHER DESTEMMER SEMICENTRIFUGAL ENO 20



Rubber roller



ENO 20 INOX - with engine, Inox




ENO 20 - with engine, smalted hopper



Safety protection

MODEL		
Cod.	Description	€
482	ENO 20 - Aluminium roller, smalted	1.000
483	ENO 20 - Rubber roller, smalted	1.100
485	ENO 20 INOX - Aluminium roller	1.780
486	ENO 20 INOX - Rubber roller	2.000

OPTIONAL		
Cod.	Description	€
006	Safety guard with internal pyramid grid 	110

### STANDARD FEATURES

- CE motor with emergency stop
- Stainless steel basket
- Stainless steel centrifuge pump
- Stretch wrap packaging
- Steel protective casing

MODEL	ENGINE HP (Kw) MF-TF	HOURLY PRODUCTION	SPEED	PUMP	PUMP HEADS	DIMENSION	WEIGHT
ENO 20	2 (1,5)	1500 - 1800 Kg/h	500 RPM	60 Ø	15 Oriz. - 5 Vert.	1120x600x960 mm	70 Kg



# DESTEMMER CRUSHER SEMICENTRIFUGE ARNO 15, 25, 35



ARNO INOX - with engine



ARNO - with engine, smaltered



Safety protection




Opening system

MODEL		
Cod.	Description	€
033	ARNO 15 - smaltered	940
233	ARNO 15 INOX	1.770
042	ARNO 25 - smaltered	1.050
242	ARNO 25 INOX	1.850
052	ARNO 35 - smaltered	1.160
252	ARNO 35 INOX	2.060

### STANDARD FEATURES

- CE motor with emergency stop
- Stainless steel basket
- Stainless steel centrifuge pump
- Stretch wrap packaging
- Steel protective casing

### OPTIONAL

Cod.	Description	€
006	Safety guard with internal pyramid grid 	135

MODEL	ENGINE HP (Kw) MF-TF	HOURLY PRODUCTION	SPEED	PUMP	PUMP HEADS	DIMENSION	WEIGHT
ARNO 15	2 (1,5)	2000 Kg/h	500 RPM	60/50 Ø	15 Oriz. - 5 Vert.	1100x700x900 mm	78 Kg
ARNO 25	2,5 (1,8)	3000 Kg/h	500 RPM	60 Ø	15 Oriz. - 5 Vert.	1200x700x900 mm	86 Kg
ARNO 35	2,5 (1,8)	3800 Kg/h	500 RPM	60 Ø	15 Oriz. - 5 Vert.	1300x700x900 mm	100 Kg



# DESTEMMER CRUSHER SEMICENTRIFUGE JOLLY 15/E, 25/E, 35/E



JOLLY Inox - with engine



JOLLY - with engine, smalted



Safety protection



Opening system


### STANDARD FEATURES

- CE motor with emergency stop
- Stainless steel basket
- Stainless steel centrifuge pump
- Stretch wrap packaging
- steel protective casing

### MODEL

Cod.	Description	€
063	JOLLY 15/E - smalted	985
263	JOLLY 15/E INOX	1.830
082	JOLLY 25/E - smalted	1.090
282	JOLLY 25/E INOX	1.960
092	JOLLY 35/E - smalted	1.200
292	JOLLY 35/E INOX	2.230

### OPTIONAL

Cod.	Description	€
006	Safety guard with internal pyramid grid 	135

MODEL	ENGINE HP (Kw) MF-TF	HOURLY PRODUCTION	SPEED	PUMP	PUMP HEADS	DIMENSION	WEIGHT
JOLLY 15/E	2 (1,5)	2000 Kg/h	500 RPM	60/50 Ø	15 Oriz. - 5 Vert.	1130x680x900 mm	80 Kg
JOLLY 25/E	2,5 (1,8)	3000 Kg/h	500 RPM	60 Ø	15 Oriz. - 5 Vert.	1230x680x900 mm	94 Kg
JOLLY 35/E	2,5 (1,8)	3800 Kg/h	500 RPM	60 Ø	15 Oriz. - 5 Vert.	1330x680x900 mm	110 Kg



**PROFESSIONAL LINE  
GRAPE PROCESSING**



# DESTEMMER CRUSHER SEMICENTRIFUGE JOLLY AR




Video



Jolly AR INOX with engine



Opening system

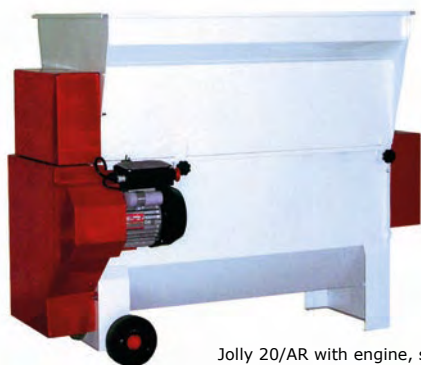

Jolly 20/AR with engine, smalted

### STANDARD FEATURES

- Autoadjustable rubber food rollers
- Destemmer shaft with rubber tips
- CE motor with emergency stop
- Stainless steel basket
- Stainless steel centrifuge pump
- Stretch wrap packaging
- Steel protective casing


MODEL		
Cod.	Description	€
102	JOLLY 20/AR - smalted with safety protection	1.450
302	JOLLY 20/AR INOX - with safety protection	2.350
312	JOLLY 30/AR INOX - with safety protection	2.650

OPTIONAL		
Cod.	Description	€
006	Safety guard with internal piramid grid, <b>in addition to the standard</b>	135
007	Difference for stainless steel screw with food-grade rubber coating (only for codes 302 and 312)	135

MODEL	ENGINE HP (Kw) MF-TF	HOURLY PRODUCTION	SPEED	PUMP	PUMP HEADS	DIMENSION	WEIGHT
JOLLY 20/AR	2 (1,5)	2000-2300 Kg/h	500 RPM	60 Ø	15 Oriz. - 5 Vert.	1180x680x900 mm	112 Kg
JOLLY 30/AR	2,5 (1,8)	3000-3300 Kg/h	500 RPM	60 Ø	15 Oriz. - 5 Vert.	1280x680x900 mm	128 Kg



# DESTEMMER CRUSHER CENTRIFUGE JOLLY 50/A

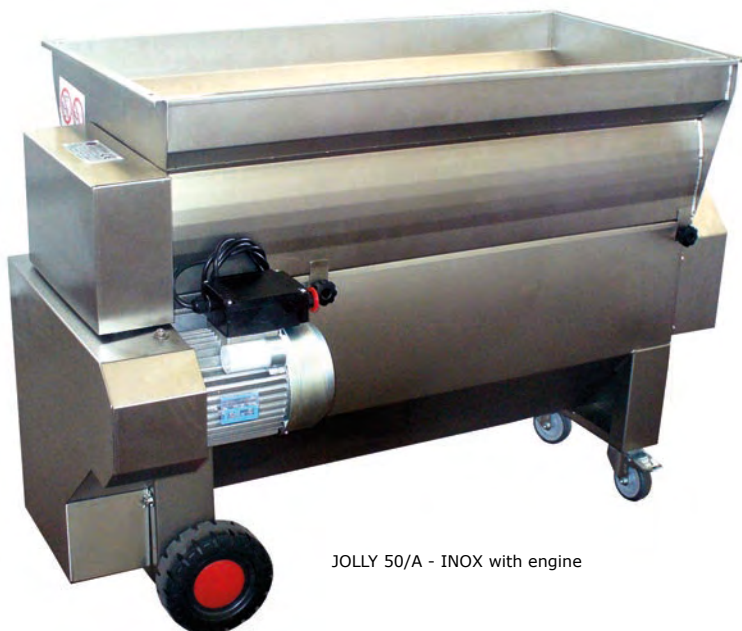

JOLLY 50/A - INOX with engine



Opening system



JOLLY 50/A- with engine, smalted

### STANDARD FEATURES

- Stainless steel centrifugal basket
- Destemmer shaft with rubber blades
- CE motor with emergency stop
- Stainless steel centrifuge pump
- Stretch wrap packaging
- steel protective casing

MODEL		
Cod.	Description	€
122	JOLLY 50/A - smalted, complete with safety protection	1.950
322	JOLLY 50/A INOX complete with safety protection	3.730

OPTIONAL		
Cod.	Description	€
006	Safety guard with internal piramid grid (in addition to the standard supplied)	190
007	Difference for stainless steel screw with food-grade rubber coating	135

MODEL	ENGINE HP (Kw) MF-TF	HOURLY PRODUCTION	SPEED	PUMP	PUMP HEADS	Ø BASKET	DIMENSION	WEIGHT
122/322	3 (2,2)	4500-5500 Kg/h	500 RPM	60 Ø	18 Oriz. - 5 Vert.	300 mm	1500x800x970 mm	130 Kg



# DESTEMMER CRUSHER CENTRIFUGE BETA



Beta INOX with engine special voltage



HOPPER Beta with filter



Opening system



## STANDARD FEATURES

- Stainless steel centrifugal basket
- Destemmer shaft with rubber tips
- CE motor with emergency stop
- Stainless steel centrifuge pump
- Stretch wrap packaging
- Steel protective casing

## MODEL

Cod.	Description	€
<b>332</b>	BETA 60 INOX with safety protection	<b>4.450</b>
<b>342</b>	BETA 90 INOX with safety protection	<b>5.200</b>
<b>352</b>	BETA 120 INOX with safety protection	<b>6.300</b>

## OPTIONAL

Cod.	Description	€
<b>006</b>	Safety guard with internal pyramid grid <b>(in addition to the standard supplied)</b>	<b>195</b>
<b>353</b>	Inox flange with conical fitting 80-60 garolla type instead of centrifuge pump	<b>30</b>

MODEL	ENGINE HP (Kw)	HOURLY PRODUCTION	SPEED	PUMP	PUMP HEADS	Ø BASKET	DIMENSION	WEIGHT
<b>332</b>	3 (2,2)	5000-6000 Kg/h	500 RPM	60 Ø	18 Oriz. - 5 Vert.	300 mm	1650x1050x1100 mm	160 Kg
<b>342</b>	4 (3)	8000-10000 Kg/h	500 RPM	60 Ø	20 Oriz. - 6 Vert.	400 mm	1950x1100x1100 mm	200 Kg
<b>352</b>	5,5 (4)	10000-12000 Kg/h	500 RPM	60 Ø	20 Oriz. - 6 Vert.	500 mm	2000x1100x1180 mm	230 Kg



# DESTEMMER CRUSHER SEMICENTRIFUGE JOLLY 40 MV



Cod. 390 + Cod. 004



Cod. 396 + Cod. 001



Roller conveyor and collection tank

## STANDARD FEATURES

- Professional basket no-laceration semicentrifuge type
- Adjustable and removable rubber rollers
- Engine 1,8 KW with emergency stop CE
- Collection tank with central screw, completely removable, double connection DN80
- Destemmer shaft with rubber tips
- N°4 wheels Ø 100 mm
- Safety protection CE

## MODEL

Cod.	Description	€
<b>390</b>	JOLLY 40 MV - with crushing unit and collection tank with safety protection included	<b>4.100</b>
<b>396</b>	JOLLY 40 MV - with crushing unit, without collection tank, with higher inox wheels. With safety protection.	<b>3.610</b>

## OPTIONAL

Cod.	Description	€
<b>001</b>	Manual speed variator	<b>550</b>
<b>004/40</b>	Electronic speed variator IP66	<b>1.050</b>
<b>007</b>	Difference for inox loading screw with rubber profile	<b>180</b>
<b>019/40</b>	Additional basket with different hole	<b>210</b>

MODEL	ENGINE HP (Kw)	HOURLY PRODUCTION	SHAFT SPEED	ATTACCO PUMP	DIMENSION mm	WEIGHT
<b>390/396</b>	2,5 (1,8) MF 2,5 (1,8) TF	2000-4000 Kg/h	400-600 RPM	80-60 Ø	1390x800x1320 (1370)	160 Kg



# DESTEMMER CRUSHER CENTRIFUGE JOLLY 40 REVERSE



Control panel



Cod. 014 collection tank



## STANDARD FEATURES

- Centrifuge professional basket, no laceration type 24 mm perforation
- Adjustable and removable rubber rollers
- Destemmer shaft with rubber tips
- Electronic speed variator 1,1 KW for destemming unit
- Motor gear reducer 0,75kw for crushing unit
- Central opening
- N.4 wheels
- CE Safety protection

## MODEL

Cod.	Description	€
<b>388</b>	JOLLY 40 Reverse, with crushing unit, electronic variator, safety protection	<b>6.000</b>

## OPTIONAL

Cod.	Description	€
<b>014</b>	Collection tank with central screw, double connection DN80, cardan shaft	<b>580</b>
<b>019/60</b>	Additional basket with different hole	<b>630</b>
<b>3881</b>	Difference for single-phase motorization (panel separate from the machine body)	<b>945</b>


MODEL	ENGINE HP (Kw)	HOURLY PRODUCTION	SHAFT SPEED	Ø BASKET	DIMENSION mm	WEIGHT
<b>388</b>	2,5 (1,8) MF/TF	2000-4000 Kg/h	450-600 RPM	250	1800x880x1350	180 Kg



# DESTEMMER CRUSHER INOX JOLLY 60 MV



Video

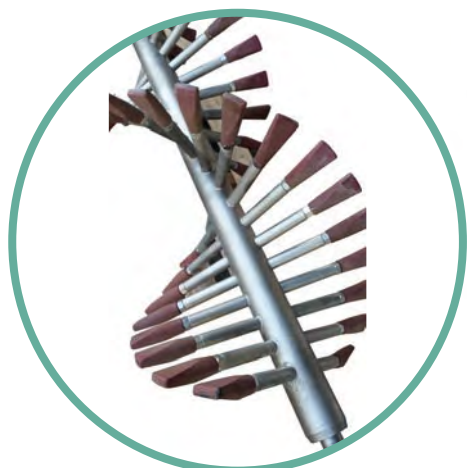

Cod. 003



Opening system

### STANDARD FEATURES

- Centrifuge professional basket, no laceration type
- Adjustable and removable rubber roller
- Rubber profile screw welded on the basket
- Electronic speed variator 2,2 Kw
- Destemmer shaft with rubber tips
- Central opening for removing shaft and basket
- Removable control panel with emergency stop
- N°4 wheels Ø 150 mm
- Safety protection CE

MODEL		
Cod.	Description	€
391	JOLLY 60 MV - with electronic speed variator, safety protection and crusher unit	7.280
OPTIONAL		
Cod.	Description	€
014-60	Collection tank with central screw, double connection DN80, cardan shaft	630
003-60	Destemmer shaft with adjustable cylinder	340
016-60	Larger hopper for macrobin use	525
007	Inox loading screw with rubber profile	210
019-60	Additional basket with different hole	850
095	Difference for centrifugal net in polyethylene	370

MODEL	ENGINE HP (Kw)	HOURLY PRODUCTION	SHAFT SPEED	Ø BASKET	FITTING PUMP	DIMENSION mm	WEIGHT
391	2,25 (1,6) MF/TF	4000-6000 Kg/h	400-600 RPM	300 mm	60-80	1600x840x1370	180 Kg



# DESTEMMER CRUSHER INOX JOLLY 60 MV with integrated sorting line



Video



### STANDARD FEATURES

- Centrifuge professional basket, no laceration type
- Adjustable and removable rubber rollers
- Rubber profile screw welded on the basket
- Mechanical speed variator 0,5 KW for sorting table
- Electronic speed variator 2,2 KW for destemmer
- Destemmer shaft with rubber plate
- No loading screw
- Removable control panel with emergency stop

### MODEL

Cod.	Description	€
<b>391+008</b>	JOLLY 60 MV - with integrated sorting table, crushing unit, speed variator	<b>10.100</b>

### OPTIONAL


Cod.	Description	€
<b>014-60</b>	Collection tray with central screw, cardan transmission. Double pump fitting DN 80	<b>630</b>
<b>003-60</b>	Difference for destemmer shaft with adjustable cylindrical	<b>340</b>
<b>095</b>	Difference for centrifugal net in polyethylene	<b>370</b>

MODEL	ENGINE HP (Kw)	HOURLY PRODUCTION	SPEED	PUMP	LOADING HOPPER	Ø BASKET	DIMENSION	WEIGHT
<b>JOLLY 60 MV</b>	4 (3) TF	4000-6000 Kg/h	400-600 RPM	60-80 Ø	825X650 mm	300 mm	4230x840x1470 mm	300 Kg



# DESTEMMER CRUSHER JOLLY 60 RS

Rubber roller

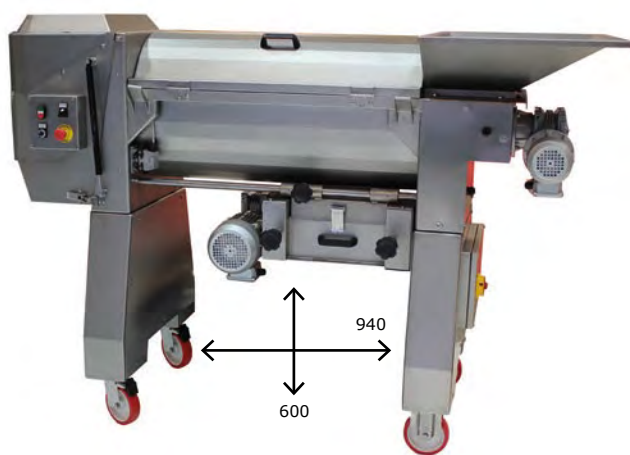

### STANDARD FEATURES

- Centrifugal basket in stainless steel, no laceration type
- Adjustable and removable rubber roller, with engine 1,5 Kw
- Loading hopper with dosing motor reducer 0,37 Kw
- Electronic speed variator for destemming unit 1,5 Kw
- Backside opening to remove shaft and basket
- Back cover in stainless steel
- Inox panel control
- Safety protection CE

### MODEL

Cod.	Descrizione	€
<b>399</b>	JOLLY 60 RS - with speed variator and crushing unit	<b>7.700</b>

### OPTIONAL

Cod.	Descrizione	€
<b>0141</b>	Collection buffer with central screw and engine	<b>1.210</b>
<b>095</b>	Difference for centrifugal basket in polyethylene	<b>370</b>
<b>0142-60</b>	Difference due to exclusion of the pressing group	<b>-1.300</b>


MODEL	ENGINE HP (Kw)	POWER	HOURLY PRODUCTION	SPEED	Ø BASKET	DIMENSION	WEIGHT
<b>399</b>	3,2 Kw	TF 380V-50Hz	4000-7000 Kg/h	350-650 RPM	300 mm	2010x830x1340 mm	180 Kg
		TF 220V-60Hz					



# DESTEMMER CRUSHER JOLLY 100 MV



Cod. 003

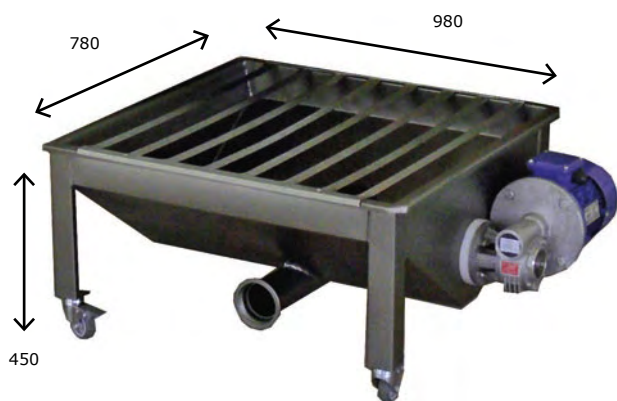

Cod. 0141

### STANDARD FEATURES

- Centrifuge basket, no laceration type
- Adjustable and removable rubber roller
- Rubber profile screw welded on the basket
- Mechanical speed variator 2,2 KW
- Destemmer shaft with rubber tips
- Loading hopper with screw
- Filter for liquid inside the loading hopper
- Central opening for removing shaft and basket
- Control panel with emergency stop CE
- Safety protection CE

### MODEL

Cod.	Description	€
<b>392</b>	JOLLY 100 MV - with gear speed variator and crushing unit	<b>9.700</b>

### OPTIONAL

Cod.	Description	€
<b>0141</b>	Collection hopper with central screw, engine HP 1. Double pump fitting DN 80	<b>1.210</b>
<b>004/100</b>	Difference for electronic speed variator	<b>790</b>
<b>003-100</b>	Difference for destemmer shaft with adjustable cylinder tips	<b>370</b>
<b>016/100</b>	Extention hopper for macrobin use	<b>580</b>

MODEL	ENGINE HP (Kw)	HOURLY PRODUCTION	SPEED	Ø BASKET	DIMENSION	WEIGHT
<b>392</b>	3 (2,2)	7000-12000 Kg/h	400-600 RPM	400 mm	2250x1050x1400 mm	280 Kg



# DESTEMMER CRUSHER JOLLY REVERSE



Video



Antilaceration basket




Destemmer shaft



Loading hopper filter



Loading hopper variator

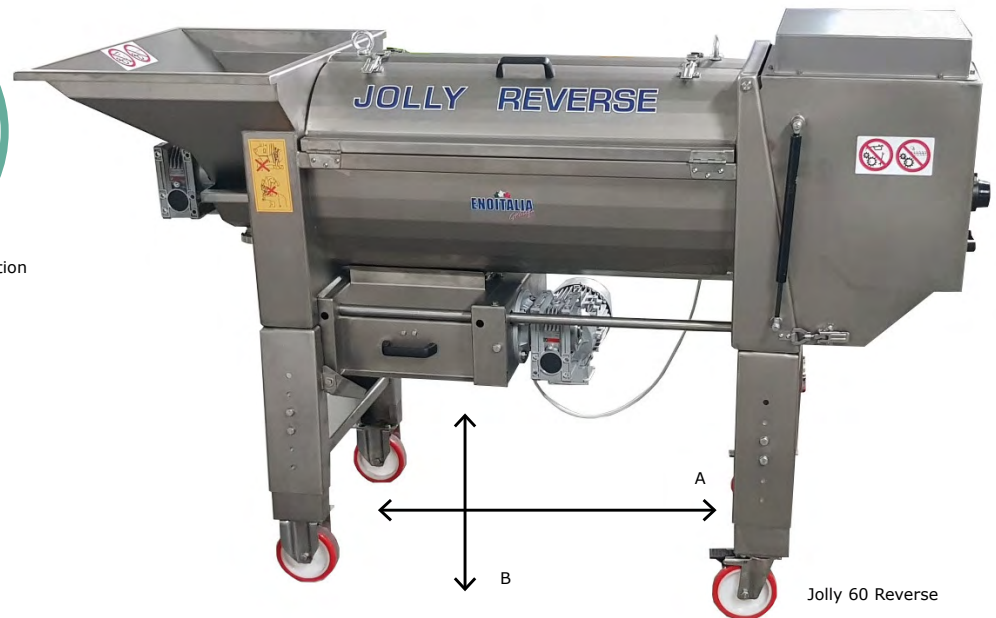

Jolly 60 Reverse

## STANDARD FEATURES

- Centrifuge basket, no laceration type in stainless steel
- Adjustable and removable rubber roller, with motor Kw 1,5
- Rubber profile screw welded on the basket
- Loading hopper with gear speed variator KW 0,37
- Electronic speed variator for the shaft and the basket
- Destemmer shaft with adjustable rubber tips
- Automatic cleaning system inside the machine (optional for Jolly 60 Reverse)
- Filter for liquid inside the loading hopper DIN 50
- Telescopic legs
- Backside opening for removing shaft and basket
- Back cover in stainless steel
- Inox control panel
- Stainless steel protective casing

## MODEL

Cod.	Description	€
<b>389</b>	JOLLY 60 REVERSE with crushing unit	<b>8.800</b>
<b>394</b>	JOLLY 100 REVERSE with crushing unit	<b>11.300</b>
<b>395</b>	JOLLY 180 REVERSE with crushing unit	<b>20.000</b>

## OPTIONAL

Cod.	Description	€
<b>0141</b>	Collection with central screw and motor	<b>1.210</b>
<b>016/100</b>	Larger hopper for macrobin use	<b>580</b>
<b>9125/R</b>	Industry 4.0 ready with remote control	<b>3.570</b>
<b>096</b>	Washing system for Jolly 60 (as standard on 100-180)	<b>370</b>
<b>095</b>	Difference for centrifugal basket in polyethylene for code 389	<b>370</b>
<b>9137</b>	Difference for centrifugal basket in polyethylene for code 394	<b>1.160</b>


MODEL	ENGINE HP (Kw)	HOURLY PRODUCTION	SPEED	Ø BASKET	A (mm)	B (mm)	DIMENSION	WEIGHT
<b>389</b>	4,5 (3,2)	4000-7000 Kg/h	350-650 RPM	300 mm	970	580-940	2010x830x1190/1340 mm	260 Kg
<b>394</b>	5,5 (4)	7000-12000 Kg/h	350-650 RPM	400 mm	1300	600-960	2600x1050x1530/1930 mm	380 Kg
<b>395</b>	7 (5,5)	15000-19000 Kg/h	350-650 RPM	520 mm	1300	570-970	2880x1220x1550/1950 mm	600 Kg



# DESTEMMER CRUSHER JOLLY REVERSE with automatic sorting table



Video

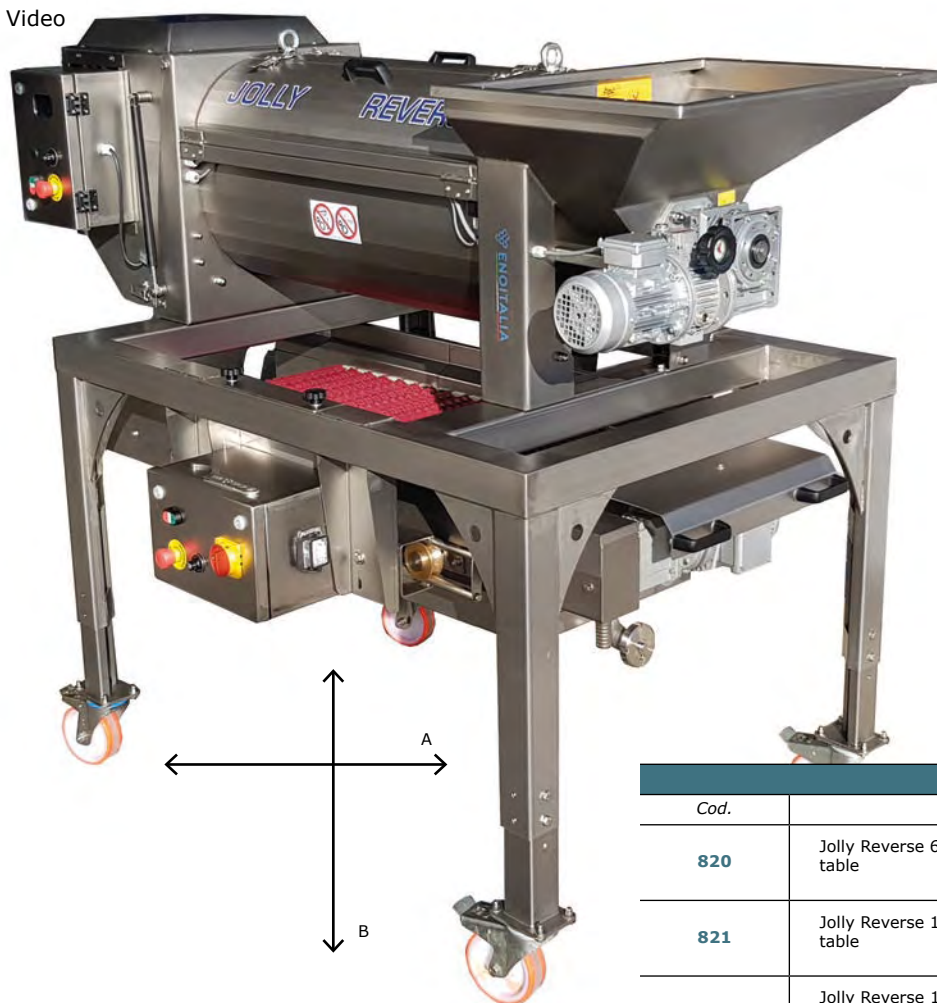

Sorting table



MODEL		
Cod.	Description	€
<b>820</b>	Jolly Reverse 60 with automatic sorting table	<b>23.300</b>
<b>821</b>	Jolly Reverse 100 with automatic sorting table	<b>28.600</b>
<b>822</b>	Jolly Reverse 180 with automatic sorting table	<b>37.100</b>

OPTIONAL		
Cod.	Description	€
<b>831</b>	Motorized roller unit for installation under the automatic sorting table	<b>3.150</b>
<b>823</b>	Difference for motorised waste discharge	<b>2.630</b>
<b>824</b>	Only selection table with rollers on frame max. capacity 7 t/h	<b>17.400</b>
<b>825</b>	Only selection table with rollers on frame max. capacity 10 t/h	<b>21.500</b>

### STANDARD FEATURES

- MODEL Jolly 60 Reverse / 100 Reverse destemmer
- Automatic selection roller conveyor
- Roller conveyor install on wheel for adjustable position
- Electronic speed variator for selection roller conveyor
- Removable must collection tank complete with filtration sieve
- Support structure in stainless steel with telescopic legs

MODEL	ENGINE	PRODUCTION	A (mm)	B (mm)	DIMENSION	WEIGHT
<b>820</b>	4,3 Kw	4000-6000 Kg/h	1267/685	722/972	2050x1100x1950/1700	490 Kg
<b>821</b>	5,4 Kw	7000-10000 Kg/h	1267/685	722/972	2600x1250x2250/1980	610 Kg



# DESTEMMER CRUSHER JOLLY REVERSE with vibrating sorting table



Video



Cod. 818

Cod. 831



## STANDARD FEATURES

- MODEL Jolly 60 Reverse / Jolly 100 Reverse destemmer
- Structure in AISI 304 stainless steel to support the destemmer with telescopic legs
- Vibrating table in stainless steel size 800x3000
- Must collection tank on vibrating table with connection DIN 50
- Electronic speed variator for vibrating table
- CE electrical panel

## MODEL

Cod.	Description	€
<b>818</b>	Jolly Reverse 60 with vibrating sorting table	<b>24.700</b>
<b>819</b>	Jolly Reverse 100 with vibrating sorting table	<b>28.400</b>

## OPTIONAL

Cod.	Description	€
<b>831</b>	Motorized roller unit for installation under the automatic sorting table	<b>3.620</b>
<b>825</b>	Only vibrating sorting table 3000x800	<b>17.000</b>

MODEL	ENGINE	PRODUCTION	DIMENSION	WEIGHT
<b>818</b>	3,6 Kw	4000-6000 Kg/h	2100x3100x1950 mm	640 Kg
<b>819</b>	4,4 Kw	7000-10000 Kg/h	2600x3100x2250 mm	760 Kg



# MOTORIZED CRUSHER

Cod. 830+6201



## STANDARD FEATURES

- Frame in stainless steel
- Telescopic legs
- n°2 adjustable rubber rollers
- Height under the roller 520/720 mm
- Loading hopper 1475x725 mm
- Loading height 1065/1265 mm
- Engine HP 1,5 threephase with panel control CE

## MODEL

Cod.	Description	€
<b>830</b>	Motorized crusher for whole grape and destemmed grape	<b>3.500</b>

## OPTIONAL

Cod.	Description	€
<b>004-RV</b>	Electronic speed variator	<b>1.260</b>

MODEL	ENGINE HP (Kw)	CAPACITY	DIMENSION	WEIGHT
<b>830</b>	1,5 (1,1)	10 Ton / h	1475x835x1590/1390 mm	100 Kg



# SORTING TABLE NC



## STANDARD FEATURES

- Sorting table wide Length 600-800 mm
- Frame in stainless steel AISI 304
- Telescopic legs +/- 50 mm
- Gear speed variator kw 0,75 three-phase
- Lateral canal for selected grape
- Hopper for discharging the selected grape
- CE panel control
- N°4 wheel with brake
- Scraper for cleaning

## MODEL

Cod.	Description	€
<b>811</b>	NC 2500 - 2500x800 mm	<b>10.200</b>
<b>813</b>	NC 3000 - 3000x800 mm	<b>11.100</b>
<b>815</b>	NC 3500 - 3500x800 mm	<b>11.300</b>
<b>817</b>	NC 4000 - 4000x800 mm	<b>12.000</b>

## OPTIONAL

Cod.	Description	€
<b>004-NC</b>	Electronic speed variator	<b>800</b>

MODEL	INTERNAL WIDE	TABLE HEIGHT	DIMENSION TYPE 2500	DIMENSION TYPE 3000	DIMENSION TYPE 3500	DIMENSION TYPE 4000	CAPACITY
<b>NC 800mm</b>	600	1080-1180 mm	2700x1200x1150 mm 250 Kg	3200x1200x1150 mm 270 Kg	3700x1200x1150 mm 290 Kg	4200x1200x1150 mm 310 Kg	2-10 Ton / h



# VIBRATING HOPPER



### STANDARD FEATURES

- Stainless steel frame
- Adjustable levelling feet
- Vibrating table with liquid drainage
- DIN50 liquid extraction connection
- 2 x 0.3 kW vibrating motors
- Electric speed variator

### MODEL

Cod.	Description	€
<b>4230</b>	Vibrating hopper	<b>10.580</b>

### OPTIONAL



Cod.	Description	€
<b>016-TV</b>	Overflow outlet for BINS	<b>2.600</b>

MODEL	POWER	DISCHARGE HEIGHT	LOAD HEIGHT	DIMENSION	WEIGHT
<b>4230</b>	0,7 Kw	1150 mm	1556 mm	1200x1330x1160	---



# SORTING AND LOADING LINE TC

Cod. 429 + Cod. 016

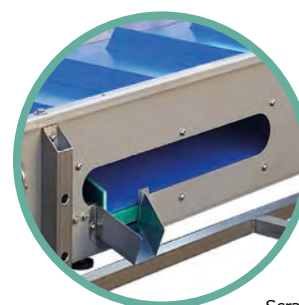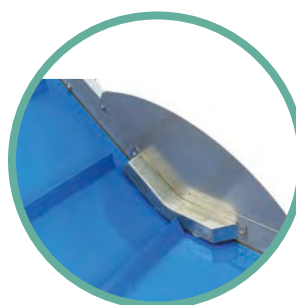

Scraper

### STANDARD FEATURES

- Double cover transilon tape, useful width 600 mm profile H. 40 mm, stainless steel coupling hinge
- Structure in AISI 304 stainless steel
- Telescopic legs with 4 stainless steel wheels Ø 100 mm
- Electrical system with emergency stop
- Three-phase motor (single-phase with code 004)
- Mechanical speed variator 1,5 Kw
- Easy cleaning system with inspection doors, liquid scraper and anti-retention structure
- Stainless steel loading hopper

### MODEL

Cod.	Description	€
<b>429</b>	TC 4600 - L. 4600 mm	<b>11.800</b>


### OPTIONAL

Cod.	Description	€
<b>004/TC</b>	Electronic speed variator three-phase or single-phase IP66	<b>560</b>
<b>016/TC</b>	Larger hopper for macrobin use (dimension 1300 x 1100)	<b>1.050</b>

MODEL	ENGINE	LENGHT SORTING TABLE	LENGHT ELEVATOR	HEIGHT TABLE	HEIGHT DISCHARGING	CAPACITY	WEIGHT	DIMENSION
<b>429</b>	1,5 Kw	3000 mm	1600 mm	800-1050 mm	1870-2000 mm	2-10 Ton/h	230 Kg	4000x800x2500 mm



# BELT ELEVATOR SC

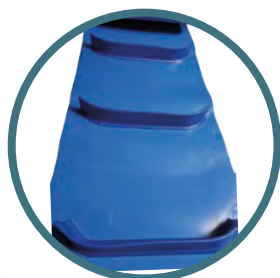

### STANDARD FEATURES

- Structure in AISI 304 stainless steel
- Double covering food transilon belt width 450 mm with profile H. 50 mm curved
- Stainless steel loading hopper with recovery tank liquids and side pump connection
- Belt cleaning scraper
- Hydraulic piston for height adjust, from 35 to 50 degree
- 4 wheel for driving
- Mechanical speed variator 1,5 Kw
- 380V 50Hz three-phase motor
- Electrical system with emergency stop

### MODEL

Cod.	Description	€
423	SC 3000 - L. 3000 mm, width 450 mm	8.610
424	SC 3500 - L. 3500 mm, width 450 mm	8.920
4241	SC 4000 - L. 4000 mm, width 450 mm	11.500
4242	SC 5000 - L. 5000 mm, width 450 mm	12.700
4243	SC 6000 - L. 6000 mm, width 450 mm	on demand

### OPTIONAL

Cod.	Description	€
016/SC	Larger hopper for macrobin use	1.000
004/SC	Difference for electronic variator	560
4245	Telescopic and swivel exhaust nozzle	1.500

MODEL	LENGHT	ENGINE HP (Kw)	HOPPER DIMENSION	LOADING HEIGHT	DISCHARGE HEIGHT	CAPACITY	WEIGHT
SC 3000	3000 mm	2 (1,5)	910x750 mm	710/480 mm	1680/2190 mm	2-10 Ton/h	230 Kg
SC 3500	3500 mm	2 (1,5)	910x750 mm	710/480 mm	1960/2570 mm	2-10 Ton/h	250 Kg
SC 4000	4000 mm	2 (1,5)	910x750 mm	710/480 mm	1800/2600 mm	2-10 Ton/h	320 Kg
SC 5000	5000 mm	2 (1,5)	910x750 mm	710/480 mm	1950/3300 mm	2-10 Ton/h	400 Kg



# SCREW ELEVATOR U-200



TABLE COD. 421

A mm	B mm
1880	200
1800	330
1520	410
1170	550



### STANDARD FEATURES

- Screw in inox diameter Ø 200mm length 3,00/4,00 mt
- Loading hopper with connection fitting for liquid
- Open cover lid for cleaning
- Winch to adjust the height
- Stainless steel trolley with wheels
- Engine 380V 50Hz three-phase
- CE panel control

### MODEL

Cod.	Description	€
<b>421</b>	U-200 - L. 3000 mm	<b>4.930</b>
<b>425</b>	U-200 - L. 4000 mm	<b>5.770</b>

### OPTIONAL

Cod.	Description	€
<b>427</b>	Electronic speed variator	<b>860</b>
<b>016/U</b>	Longer hopper for macrobin use	<b>1.000</b>

MODEL	LENGHT	ENGINE HP (Kw)	HOPPER DIMENSION	LOADING HEIGHT	DISCHARGE HEIGHT	CAPACITY	WEIGHT
<b>421</b>	3000 mm	2 (1,5)	650x720x900 mm	710/480 mm	1600/2000 mm	2-10 Ton/h	90 Kg
<b>425</b>	4000 mm	2 (1,5)	650x720x900 mm	710/480 mm	1900/2500 mm	2-10 Ton/h	130 Kg
<b>TROLLEY</b>	---	---	1330x330x1450 mm	---	---	---	35 Kg



# PNEUMATIC PRESS



## STANDARD FEATURES

- 7-inch touch screen
- PLC with 12 automatic programmes
- Manual controls
- 30 customisable programmes
- Becker compressor
- Becker blower
- TOP PVC membrane (polyurethane optional)
- Warning light
- Fast-forward programme
- Level sensor
- Sealed cylinder with drainage channels
- Internal DIN 80 connection for wash water discharge
- Axial inlet with DN80/DN100 ball valve
- Collection tank with DIN 40 connection

## MODEL

Cod.	Description	€
<b>6506</b>	GAMMA 8	<b>23.780</b>
<b>6507</b>	GAMMA 10	<b>26.250</b>
<b>6508</b>	GAMMA 17	<b>30.650</b>
<b>6509</b>	GAMMA 22	<b>35.000</b>
<b>6510</b>	GAMMA 27	<b>40.000</b>

## OPTIONAL

Cod.	Description	€
<b>432</b>	250 mm stainless steel leg extensions	<b>865</b>
<b>9125-P</b>	Industry 4.0-ready	<b>4.330</b>
<b>6550</b>	Automatic product load pressure switch	<b>1.200</b>

MODEL	DOOR DIMENSIONS	WHOLE GRAPE CAPACITY	DESTEMMED GRAPE CAPACITY	FERMENTED GRAPE CAPACITY	TANK CAPACITY	WEIGHT (KG)	DIMENSION
<b>6506</b>	60x41 cm	600 Kg	2200 Kg	3000 Kg	380 LT.	270	220x121h146 cm
<b>6507</b>	70x47 cm	800 Kg	2850 Kg	3800 Kg	430 LT.	300	248x127h159 cm
<b>6508</b>	70x47 cm	1300 Kg	4200 Kg	6200 Kg	610 LT.	500	250x146x177 cm
<b>6509</b>	70x47 cm	1680 Kg	5800 Kg	8000 Kg	500 LT.	810	300x146x177 cm
<b>6510</b>	70x47 cm	2000 Kg	6500 Kg	10500 Kg	600 LT.	1220	321x165x177 cm



# BINS WASHER



## STANDARD FEATURES

- Stainless steel support frame on wheels
- Adjustable upper and lower wash nozzles
- Tray width: 45 cm (60 cm on request)
- Tray height: 35/45 cm (55 cm on request for 60 cm width)
- High-pressure pump (on PLUS models)
- Provision for sanitiser dispenser (on PLUS models)


## MODEL

Cod.	Description	€
<b>8301</b>	Bins washer, size 45x35	<b>3.900</b>
<b>8302</b>	Bins washer PLUS, size 45x35	<b>6.300</b>
<b>8303</b>	Bins washer, size 45x45	<b>4.000</b>
<b>8304</b>	Bins washer PLUS, size 45x45	<b>6.400</b>

MODEL	BINS WIDTH	BINS HEIGHT	WATER CAPACITY	DIMENSION	WEIGHT
<b>8031</b>	45 cm	35 cm	18-20 litri/min	2030x670x1121 mm	90 Kg
<b>8032</b>	45 cm	35 cm	21 litri/min	2030x670x1121 mm	120 Kg
<b>8033</b>	45 cm	45 cm	18-20 litri/min	2030x670x1121 mm	90 Kg
<b>8034</b>	45 cm	45 cm	21 litri/min	2030x670x1121 mm	120 Kg



# MANUAL AND AUTOMATIC SVINATORE

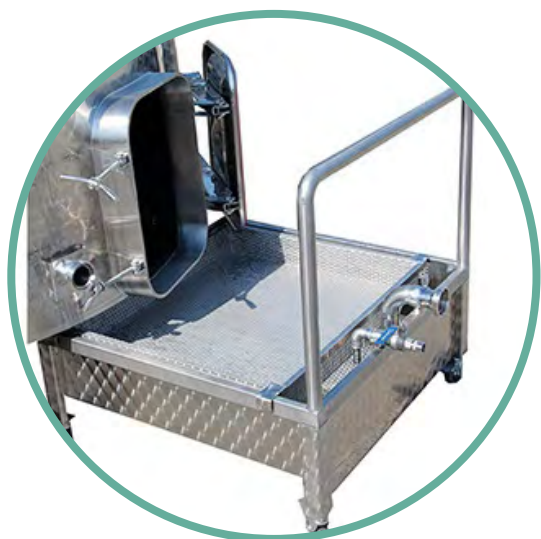

### STANDARD FEATURES

- Frame in stainless steel AISI 304
- Extratable filter in stainless steel, holes 5x20
- Fitting for connection pump DN 50
- 4 wheels with brakes


MODEL		
Cod.	Description	€
851	Svinatore SV2	760
4275	Automatic svinatore with level marker panel control with plug to connect external pump single-phase (pump not included)	1.220
4276	Automatic svinatore with level marker panel control with plug to connect external pump three-phase (PUMP non inclusa)	1.360
4273	Automatic svinatore, with single-phase panel control, and integrated pump ENOS	1.470

MODEL	FITTING	DIMENSION	CAPACITY
851	50 garolla	600x700x390 mm	130 lt



# AUTOMATIC WASHING TANK

Cod. 997

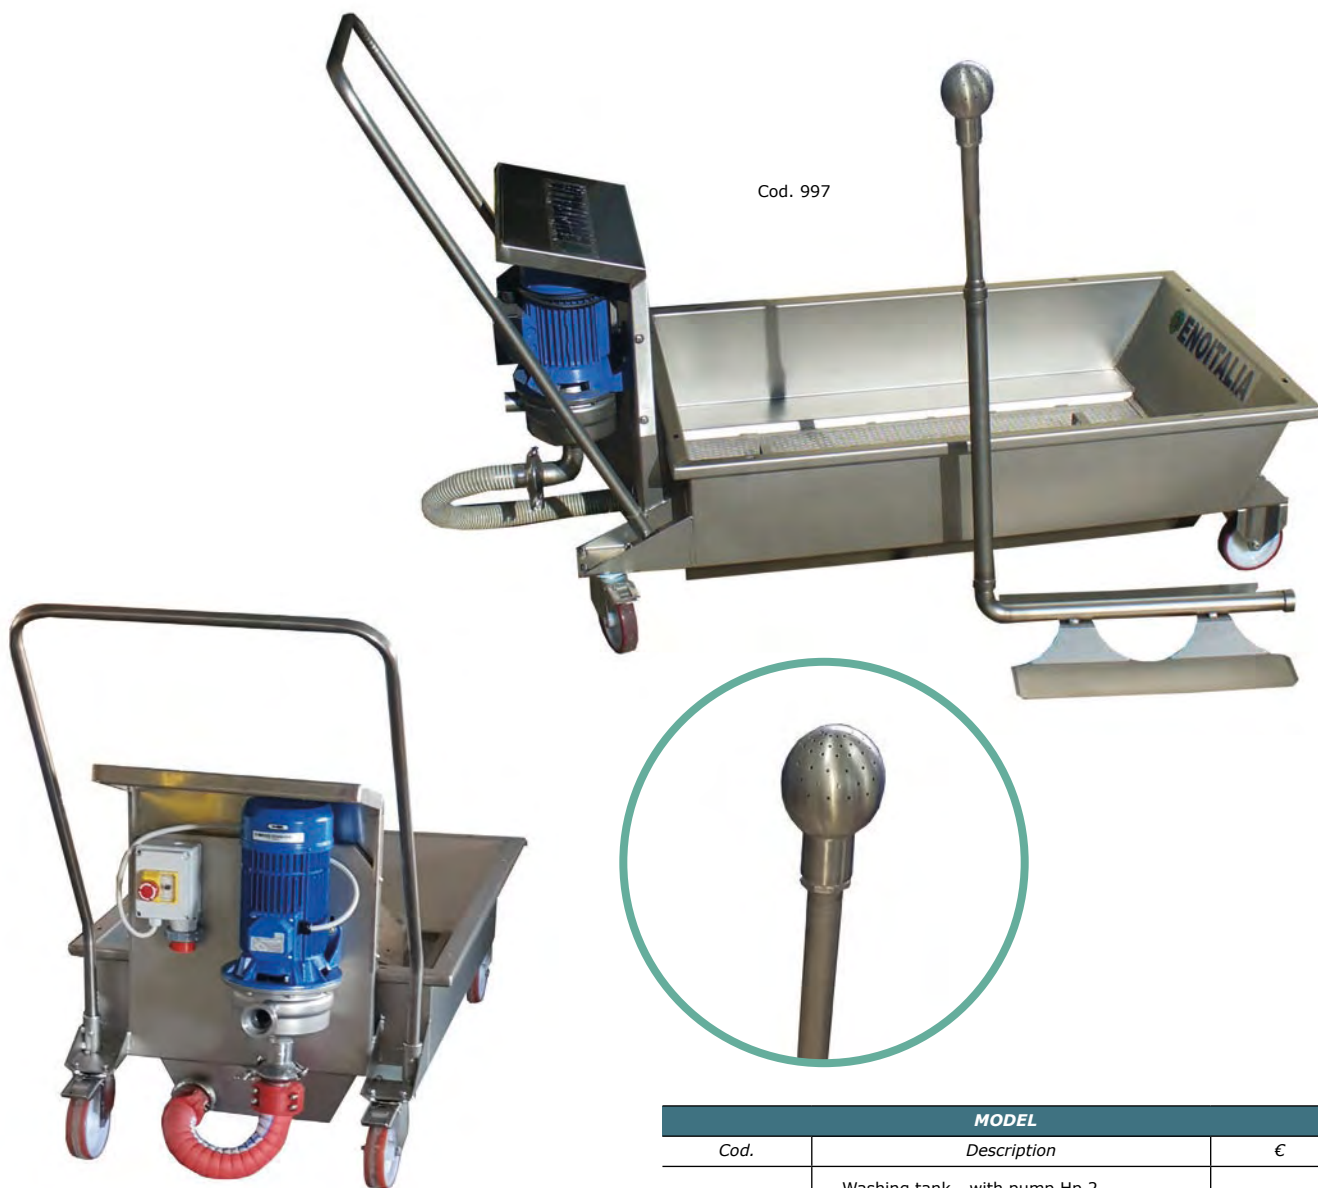

## STANDARD FEATURES

- Frame in stainless steel AISI 304
- Centrifuge pump in stainless steel
- Extractable filter for cleaning
- Connection for total drain
- 4 wheels with brake
- Panel control with emergency stop and termic protection
- Washing head in stainless steel, connection garolla 40 (OPTIONAL)

## MODEL

Cod.	Description	€
996	Washing tank - with pump Hp 2 single-phase	2.520
997	Washing tank - with pump Hp 4 three-phase	2.730

## OPTIONAL

Cod.	Description	€
993	Stainless steel washing slide complete with anti-scratch profiles and 700mm extension. Terminal sphere d.90	315

MODEL	ENGINE HP (Kw)	FITTING	HOPPER DIMENSION	CAPACITY	MAXIMUM HEIGHT TANK'S CYLINDER
996	2 (1,5)	40 garolla	760x1100x370 mm	220 lt	3 mt
997	4 (3)	40 garolla	760x1100x370 mm	220 lt	6 mt



# MOTORIZED MIXER



Video

MIXER WITH REMOVABLE SHAFT



MIXER WITH FIXED SHAFT



Cod. 872



Cod. 872 + 874 + 876

## STANDARD FEATURES

- Electric motor three-phase, 1,1 Kw/0,8 Kw
- Panel control with emergency stop 24V circuit and transformer (except MIX 90)
- Mechanical seal Grafite/NBR max 12 BAR
- Removable stainless steel shaft length 48 cm.
- Folding helix, automatic opening width 15 cm.
- Inox valve for dosing
- Connection fitting to be indicate at the minimum way 36mm diameter

MODEL		
Cod.	Description	€
870	Motorized mixer MIX100	1.370
872	Motorized mixer MIX100 with electronic speed variator Single-phase	2.400
873	Motorized mixer MIX100 with electronic speed variator Three-phase	2.300
880	Mixer with FIXED SHAFT without trolley	1.280

OPTIONAL		
Cod.	Description	€
876	Inox support with manual regulation (Height center valve 30-140 cm)	435
874	Dosing pump EURO 20, HP 1,5 installed on bord with special fitting	420
8790	Adjustable support stand	180
7023	Mechanical seal	110
7056	Timer (requires code 876 for installation)	420

MODEL	ENGINE HP (Kw)	POWER	SPEED	TANK max. CAPACITY	DIMENSION	WEIGHT
870	1,5 (1,1)	Three-phase	1400 RPM	300 hl	230x250x960 mm	20 Kg



# MIXER

For the full range, please see the catalogue



### STANDARD FEATURES

- Stainless steel frame
- Height control via pneumatic control unit
- Shaft with 3-blade marine propeller, Ø 160 mm
- Optional speed variator from 10 to 700 RPM
- Maximum tank capacity 200 litres (**tank not included**)
- 0.5 HP motor

### MODEL

Cod.	Description	€
<b>8310</b>	Complete mixer with inverter	<b>3.500</b>
<b>8311</b>	One-speed mixer, 1400 RPM	<b>2.800</b>


MODEL	ELIC TYPE	POWER SUPPLY	POWER	DIMENSION (mm)	WEIGHT
<b>8310</b>	3 sails - diameter 160	TF 380V	0.37 Kw	1100x1200x1200/1700	---
<b>8311</b>	3 sails - diameter 160	TF 380V	0.37 Kw	1100x1200x1200/1700	---



# CARTON FILTER VIRGILIO and MINI VIRGILIO



Mod. VIRGILIO

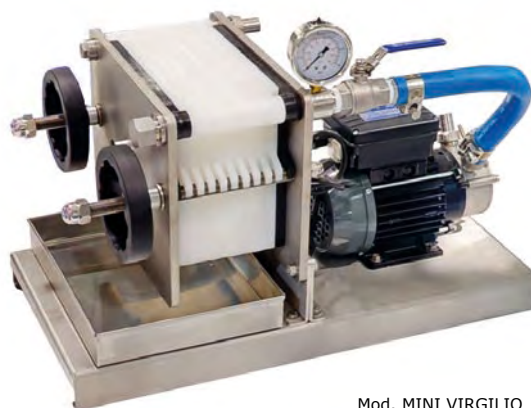

Mod. MINI VIRGILIO

MODEL		
Cod.	Description	€
901	Filter MINI VIRGILIO 6 plate (PUMP included)	675
902	Filter MINI VIRGILIO 10 plate (PUMP included)	712
903	Filter VIRGILIO 10 plate	820
904	Filter VIRGILIO 20 plate	915
905	Filter VIRGILIO 30 plate	1.065
906	Filter VIRGILIO 40 plate	1.155

OPTIONAL (for filter VIRGILIO)		
Cod.	Description	€
9360	Difference for installation centrifuge pump ENOS 20	200
9361	Difference for installation volumetric pump EURO 20 for oil and wine	420
9362	Difference for installation centrifuge pump 1400 RPM	435
907	Reversing plate in inox (for cod. 905 and 906)	170
9363	Difference for installation bypass on cod. 9316	80

## STANDARD FEATURES

### FILTER MINIVIRGILIO

- Frame in stainless steel AISI 304
- Plate in stainless steel and PPA dimension 20\*20mm
- Pump centrifuge type ENOS 20 in stainless steel, 1,9 bar pressure
- Manometer

### FILTER VIRGILIO

- Trolley in stainless steel AISI 304
- Filter plate in stainless steel and PPA, dimension 20x20
- Sample tap in stainless steel
- Stainless steel manometer

MODEL	PLATE NUMBER	CARTON DIMENSION	FILTERING SURFACE M2	WINE CAPACITY L/H	OIL CAPACITY L/H	DIMENSION MM/KG
901	6	20x20 cm	0,24	80-200	80	600x330x440/13
902	10	20x20 cm	0,4	130-280	130	600x330x440/13
903	10	20x20 cm	0,4	130-280	130	600x500x750/32
904	20	20x20 cm	0,8	600-900	300	600x500x750/36
905	30	20x20 cm	1,2	900-1500	400	600x500x750/49
906	40	20x20 cm	1,6	1400-1800	500	600x500x750/54



# FILTER 40X40



## STANDARD FEATURES

- Stainless steel support trolley
- 1.5 HP rubber impeller pump with bypass (Euro 30)
- Visual inspection ports on product inlet and outlet
- Wine sampling ports on product inlet and outlet
- Bypass circuit with DIN40 butterfly valves
- 2 pressure gauges
- Food-grade polypropylene / Noryl plates

MODEL		
Cod.	Description	€
908	Filter 20 plate	5.460
909	Filter 30 plate	5.980
910	Filter 40 plate	7.240
911	Filter 50 plate	7.900

OPTIONAL		
Cod.	Description	€
914	Difference without pump	-470
912	Oil kit with Noryl plates and a gloss finish (908-909-910)	220
913	Reversing kit comprising valve, sight glass, wine tester, pressure gauge (code 908-9-10)	530
915	Reversing kit for code 911	850
7410	Replacement plate 40x40	88
7411	Central screw extension (908-909-910)	140
7412	Filter plate gasket	11.5

MODEL	PLATE NUMBER	CARTON DIMENSION	FILTERING SURFACE M2	WINE CAPACITY L/H	OIL CAPACITY L/H	DIMENSION MM/KG
908	20	40x40 cm	3,2	2000	600	1200x590x950
909	30	40x40 cm	4,8	3000	700	1200x590x950
910	40	40x40 cm	6,4	4000	800	1500x590x950
911	50	40x40 cm	8,0	5000	900	1700x590x950